



## A PRODUCT OF OUR LINE ULTRA+

Chemical protection at highest level, with very best permeation properties

## PFA ultra<sup>+</sup>

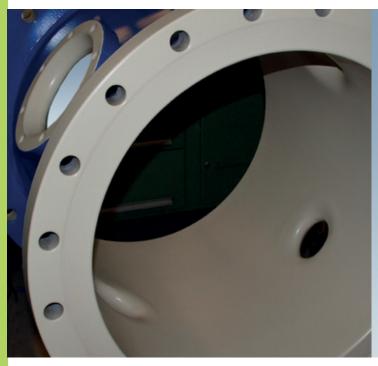

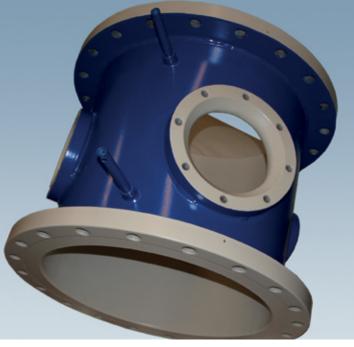

The material for this Fluorpolymer-coating, which will be applied with a specific method, is highly resistant against chemicals and acids, and has extraordinarily advantages, compared with common coating and lining systems:

- · Seamless lining for almost all designs
- · No welded joints
- Excellent bonding to substrate
- Compared with usual PFA outstanding features in permeation by using filler.
- Layer thickness from ~200  $\mu m$  up to ~1.5 mm

PFA ultra<sup>+</sup> Exceptional, universal chemical resistance at high temperatures

PFA ultra<sup>+</sup> Excellent when proven under clean

room conditions

PFA ultra<sup>+</sup> Also available in the electrically

conductive version

PFA ultra<sup>+</sup> Locally repairable

PFA ultra<sup>+</sup> Solvent-resistant

PFA ultra<sup>+</sup> Easy to clean, excellent non-stick

properties

PFA ultra<sup>+</sup> Non flammable

PFA ultra+ Cold resistant

PFA ultra<sup>+</sup> Best permeation properties

PFA ultra<sup>+</sup> Suitable for vacuum

PFA ultra\* FDA- and EU-compliant

## **RUDOLF GUTBROD GmbH**

Im Schwöllbogen 10, 72581 Dettingen/Erms, Germany, Tel. +49 (0)71 23 - 97 35-0 www.gutbrod-ptfe.de, e-mail: info@gutbrod-ptfe.de

















